

# BME280

## Integrated Environmental Unit

Bosch Sensortec



**BOSCH**  
Invented for life

### General description

The BME280 is an integrated environmental sensor developed specifically for mobile applications where size and low power consumption are key design constraints. The unit combines individual high linearity, high accuracy sensors for pressure, humidity and temperature in an 8-pin metal-lid 2.5 x 2.5 x 0.93 mm<sup>3</sup> LGA package, designed for low current consumption (3.6 µA @1Hz), long term stability and high EMC robustness.

The humidity sensor features an extremely fast response time which supports performance requirements for emerging applications such as context awareness, and high accuracy over a wide temperature range.

The pressure sensor is an absolute barometric pressure sensor with features exceptionally high accuracy and resolution at very low noise.

The integrated temperature sensor has been optimized for very low noise and high resolution. It is primarily used for temperature compensation of the pressure and humidity sensors, and can also be used for estimating ambient temperature.

The BME280 supports a full suite of operating modes which provides the flexibility to optimize the device for power consumption, resolution and filter performance.

### BME280 target applications

- ▶ Context awareness, e.g. skin detection, room change detection
- ▶ Health monitoring / well-being
  - Warning regarding dehydration or heat stroke
  - Measurement of lung volume and air flow
- ▶ Home automation control
  - Control heating, ventilation, air conditioning (HVAC)
- ▶ Internet of things
- ▶ GPS enhancement (e.g. time-to-first-fix improvement, dead reckoning, slope detection)
- ▶ Indoor navigation (change of floor detection, elevator detection)


Technical data	BME280 (prelim.)
Package dimensions	8-Pin LGA with metal 2.5 x 2.5 x 0.93 mm <sup>3</sup>
Operation range (full accuracy)	Pressure: 300...1100 hPa Temperature: -40...+85 °C
Supply voltage V <sub>DDIO</sub> Supply voltage V <sub>DD</sub>	1.2 ... 3.6 V 1.71 ... 3.6 V
Interface	I <sup>2</sup> C and SPI
Average current consumption (typ.) (1Hz data refresh rate)	1.8 µA @ 1Hz (H, T) 2.8 µA @ 1Hz (P, T) 3.6 µA @ 1Hz (H, P, T) T=temperature
Average current consumption in sleep mode	0.1 µA
<b>Humidity sensor</b>	
Response time (τ <sub>63%</sub> )	1s
Accuracy tolerance	± 3% relative humidity
Hysteresis	≤ 2% relative humidity
<b>Pressure sensor</b>	
RMS Noise	0.2 Pa (equiv. to 1.7 cm)
Sensitivity Error	± 0.25% (equiv. to 1m at 400m height change)
Temperature coefficient offset	±11.5 Pa/K (equiv. to ±12.6 cm at 1°C temperature change)
RoHS compliant, halogen-free, MSL1	

- ▶ Outdoor navigation, leisure and sports applications
- ▶ Weather forecast
- ▶ Vertical velocity indication (rise/sink speed)

### Technology and specification

Emerging applications such as indoor navigation, home automation control, personalized weather stations and innovative sport and fitness tools require a pressure sensor with high relative accuracy and a low TCO, in combination with fast response, high accuracy relative humidity and ambient temperature measurements.

Pin configuration and dimensions (top view, pads not visible)

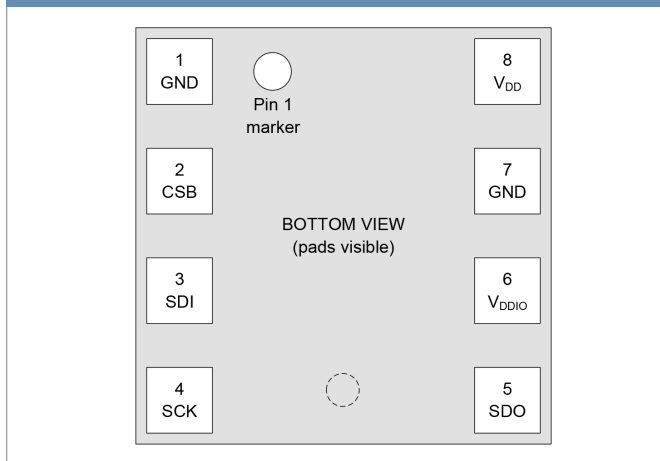

The BME280 is perfectly suitable for such applications as the device features excellent relative accuracy of  $\pm 0.12$  hPa (equivalent to  $\pm 1$  m difference in altitude), and an offset temperature coefficient (TCO) of only 1.5 Pa/K (equivalent to 12.6cm/K).

### Sensor operation

The BME280 supports I<sup>2</sup>C and SPI (3-wire/4-wire) digital, serial interfaces.

The sensor can be operated in three power modes: Sleep mode, normal mode and the forced mode. In normal mode the sensor automatically cycles between a measurement and a standby period. This mode is recommended when using BME280 built-in IIR filter when short-term disturbances (e.g. blowing into the sensor) need to be filtered. In forced mode, the sensor performs a single measurement on request and returns to sleep mode afterwards. This mode is recommended for applications which require low sampling rate or host-based synchronization.

In order to tailor data rate, noise, response time and current consumption to the needs of the user, a variety of oversampling modes, filter modes and data rates can be selected. In combination with several short term disturbance filter settings, the sensor can be programmed in a very flexible way in order to adapt to application

and power management requirements.

To simplify the design-in phase, default settings optimized for several example use-cases such as weather monitoring, elevator / stair case detection, drop detection or indoor-navigation are provided.

Pin No.	Name	Function
1	GND	Ground
2	CSB	Chip select
3	SDI	Serial data input
4	SCK	Serial clock input
5	SDO	Serial data output
6	V <sub>DDIO</sub>	Digital/Interface supply
7	GND	Ground
8	V <sub>DD</sub>	Analog supply

### Software

The Altitude Content Provider ACP2.0 software is available as a software package for BME280 which calculates the altitude with best possible accuracy. The ACP2.0 uses the sea level pressure to calculate the altitude, compensating for the non-sphericity of the earth by geoid correction, and compares its altitude with current altitude given by the GPS module, if available.

### System compatibility

The BME280 has been designed for best possible fit into modern mobile consumer electronics devices. Besides the ultra-small footprint and very low power consumption, the BME280 has very wide ranges for V<sub>DD</sub> and V<sub>DDIO</sub> supply voltages

Bosch is the world market leader in MEMS sensors. The BME280 combines this extensive experience and reliability for consumer applications. Bosch Sensortec is a subsidiary of Bosch that focuses on micromechanical components for the non-automotive markets.

#### Headquarters Bosch Sensortec GmbH

Gerhard-Kindler-Strasse 8  
72770 Reutlingen · Germany  
Telephone +49 7121 3535 900  
Fax +49 7121 3535 909  
contact@bosch-sensortec.com  
[www.bosch-sensortec.com](http://www.bosch-sensortec.com)